



ASY's asymmetric recessed LED Linear systems offers continuous runs of dot-free wall-washing, 100% lit diffuser without dark spots, easy to maintain with maintainable LED gear trays, standard bends are T, L shapes and custom bends available upon request, high-impact acrylic anti yellowing diffuser provides smooth uniform illumination, suitable for recessed mounting into ceilings, supplied with remote driver, incremental length 100mm, available with any length for continuous runs.

Material- Extruded aluminium channel with high-impact acrylic diffuser.

Finish- Silver anodized paint finish, black, white or any custom RAL colour.


Efficacy- 65lm/W

Input voltage- 240V 50/60Hz

Dimming- 1-10V, DALI or DSI.

Life: 50,000 Hours L70

Warranty: 3 years

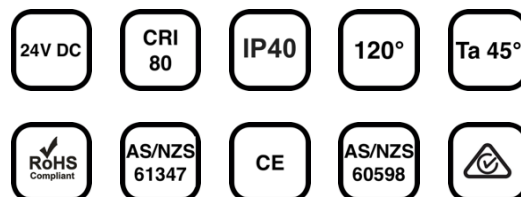



Model number	Wattage p/m	CRI	CCT	Finish	Controls
AS-20W-80-4K-W-S	15W	80	2700K	AL	S: Standard D: DALI A: 0-10V
	20W		3000K	BK	
	25W	90	4000K	WH	
	30W		RGBW	CU	

